

TUNGSTEN

OD GREEN

Basic Platform

AR15 5.56/.300 AAC

The not so basic "BASIC PLATFORM" by ATAC Defense.

- 7075 upper and lower
- · Broached magwell
- 6061 15in m-loc hand guard with QD
- 8620 bolt carrier with 9310 bolt mpi tested
- 4140 .750 diameter gas block with 304 stainless gas tube
- Mil-spec lower parts kit
- 6 position buffer tube with M4 style stock assembly

RIFLE SPECIFIC:

- 16in M4 contour 4150 CrMoV barrel 6 groove (1:7 and 1:8 available) 5.56 & 300 AAC
- Mil-Spec M4 type buttstock

PISTOL SPECIFIC:

- 7.5" or 10.25" M4 contour 4150 CrMoV barrel 6 groove (1:7 and 1:8 available) 5.56 & 300 AAC
- · MFT Battle-Link pistol tabilizer

Basic Plus Platform

AR15 5.56/.300 AAC

After requests poured in, this rifle has all the features of the "not so basic rifle", plus it's upgraded with the nickel boron bolt and oversized charging handle.

NON NFA Other Firearm

AR15 5.56

Having no stock this firearm is not a rifle, it is greater than 26" in collapsed position and is not meant to be fired from the shoulder and features a forward vertical grip to be fired with two hands which makes it not an AOW or Pistol.

- Mil-Spec lower receiver with Flared Magazine Well, Broached Magazine Well, Ambi Bullet Markings, Threaded Bolt Catch, Captured Rear Detent, Cerakote Finish
- Mil-Spec upper receiver with M4 Feed Ramps, Cerakote Finish
- M16 Profile bold carrier group, Mil-Spec MP/ HP Tested, Properly Staked 4130 Gas Key, 8620 carrier, 4340 cam pin, 8640 firing pin, 4340 extractor, S7 ejector, Nickel Boron Coated
- 4150 CrMoV barrel per *Mil-B-1159SE 1:8
 Twist, 10.5" Government Profile, HP/MPI
 Tested, 5.56 chamber, 6 groove button rifled,
 .750 diameter at gas block, 1/2x28 thread with pinned and welded muzzle brake
- 3.375 Muzzle Brake pinned and welded to barrel

- Low Profile CNC Machined 4140
 Hardened Steel Phosphate Coated gas bock, Direct Impingement, 304 stainless steel gas tube
- BUFFER: Maxim 3.8, Maxim Spring
- 11.5 in 6061 Free Float handguard, Using Knurled Barrel Nut, M-Loc attachment points, Cerakote Finish
- 7075 Aluminum Ambi charging handle, Type III Hardcoat Anodized
- · Maxim Defense PDW pistol Brace
- MFT Engage 15 degree pistol grip
- 3.5lb single stage trigger (curved or straight options)
- Vertical Grip Magpul



Atac Defense Enhanced Rifle in Cerakote burnt bronze, fitted with a Vortex optic.

Enhanced Platform

AR15 5.56/.300 AAC

Our enhancement modifications make this rifle fast to operate and a dream to shoot and weighing in at just 5.95 pounds for the 16 inch rifle.

ENHANCEMENTS INCLUDE: All the incredible features of the Basic Plus Platform +

- Single stage 3.5lb drop-in trigger
- · Anti-walk pins
- Ambi safety
- Ambi mag release with oversized mag button
- · Oversized bolt release
- · Oversized ambi charging handle
- Muzzle brake and nickel boron coated bolt carrier group
- MFT minimalist stock
- · MFT engage grip

RIFLE SPECIFIC:

 16in M4 contour 4150 CrMoV barrel 6 groove (1:7 and 1:8 available) - 5.56 & 300 AAC

PISTOL SPECIFIC:

- 7.5" or 10.25" M4 contour 4150 CrMoV barrel 6 groove (1:7 and 1:8 available)
- 5.56 & 300 AAC
- MFT Battle-Link pistol tabilizer

Patrol Rifle

AR15 5.56

Designed with input from and in use by **multiple law enforcement professionals**. Each part was selected to keep the firearm **lightweight, maneuverable, and controlable**, with or without wearing body armor.

- 7075-T6 lower receiver, mil-spec with flared magazine well, broached magazine well, ambi bullet markings, threaded bolt catch, captured rear detent, type III hardcoat anodized (black)
- 7075-T6 upper receiver, mil-spec with M4 feed ramps, type III hardcoat anodized (black)
- M16 Profile bolt carrier group, milspec MP/HP tested, properly staked 4130 gas key,8620 carrier, 4340 cam pin, 8640 firing pin, 4340 extractor, S7 ejector, nickel boron coated
- 16in 4150 CrMoV barrel per *Mil-B-1159SE (1:7 and 1:8 available) twist government profile, HP/MPI tested, .5.56 chamber, 6 groove button rifled,

- .750 diameter at gas block, 1/2x28 thread, nitride coated.
- Low profile CNC machined 4140 hardened steel phosphate coated gas bock, direct impingement, 304 stainless steel gas tube
- ·Carbine Buffer, Mil-Spec spring
- 6061 free float handguard, using knurled barrel nut, m-loc attachment points, type III hardcoat anodized

 (black)
- 7075 Aluminum ambi, type III hardcoat anodized charging handle
- MFT Battlelink Minimalist buttstock
- MFT Engage 15 degree pistol grip
- Deployed by law enforcement





ENSI

ATACDEF






Elite Rifle

AR15 5.56 on Integrated Rail Platform

The **NEXT EVOLUTION** in AR platform accuracy. Our Elite Rifle features a **full length picatinny rail** which locks the upper to the handguard to **prevent any twisting**.

- Integrated Rail Platform
- · Single stage 3.5lb drop-in trigger
- Anti-walk pins
- Ambi safety
- Ambi mag release with oversized mag button
- · Oversized bolt release
- Oversized ambi charging handle
- Muzzle brake and nickel boron coated bolt carrier group
- · Fab Defense Core S Buttstock
- · Gradus 15 degree pistol grip

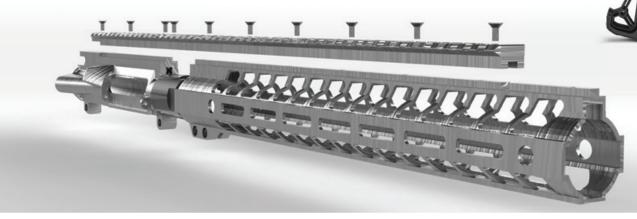

The Integrated Rail Platform is an ATAC Defense patent pending system in which the upper and handguard are assembled then machined with a full length inverted keyway down the top. A one piece picatinny rail is machined with a receiving keyway, and bolted down the top of the upper and handguard. This locks the handguard and upper together with a one piece sight rail with no interruptions or breaks. This process eliminates the need for anti-rotation tabs, and eliminates the fear of twisting a handguard or breaking a barrel nut loose. It also provides a stable picatinny platform so night vision or thermal can be mounted in front of your day optic without fear of the rail twisting or moving.

Competition Rifle

.223 Wylde

Weighing in at just 5.95 pounts this 2gun 3gun rifle is lightweight and fast with very little recoil, allowing you to move from target to target quickly.

- CNC Machined lower receiver from 7075-T6 Forging, Mil-Spec with Flared Magazine Well, Broached Magazine Well, Ambi Bullet Markings, Threaded Bolt Catch, Captured Rear Detent
- CNC Machined upper receiver from 7075-T6 Forging, Mil-Spec with M4 Feed Ramps
- 9310 Bolt, Aluminum Carrier, designed for competition shooting (5.8 oz weight) anodized finish
- 4150 CrMoV barrel per *Mil-B-1159SE 1:8 Twist, 18.0" HP/MPI Tested, .223 wylde chamber, mid length gas system, 6 groove button rifled, .750 diameter at gas block, 1/2x28 thread, nitride coated.
- Low Profile CNC Machined 4140 Hardened Steel Phosphate Coated adjustable gas bock, Direct Impingement, 304 stainless steel gas tube

- Muzzle Brake
- 6 Position Mil-Spec receiver extension 7075-T6, Aluminum Anodized, Mil-Spec End Plate, Mil-Spec Nut Torqued and Staked
- Lightweight Polymer Buffer, 10% reduced recoil spring
- 6061 Free Float handguard, Using Knurled Barrel Nut, M-Loc attachment points, Cerakote Finish
- 7075 Aluminum Ambi, Type III Hardcoat Anodized charging handle
- · MFT Battlelink Minimalist buttstock
- · MFT Engage 15 degree pistol grip
- 3.5lb single stage trigger (curved or straight options)



Long Range Rifle

AR10 .308 or 6.5 Creedmoor

ATAC Defense ADLRR (ATAC Defense Long Range Rifle) Rifle was designed to give **long range accuracy** in a light-weight AR10 platform.

- 7075 T6 aluminum lower reveiver laser engraved with ambidextrous bullet markings, and ATAC Defense information
- 6061 T6 aluminum billet upper receiver
- 4150 CrMoV barrel with 6-groove rifling at a 1:10 twist rate
- 4140 steel .750 diameter low profile gas block mated to a 304 stainless steel gas tube
- 7075 6-position receiver extension tube (buffer tube)
- 6061 aluminum free fload hand guard

- Tuned 3.5lb, single stage drop in trigger (curved or straight)
- Oversized Mag Release
- 90 degree, ambidextrous safety made from 4140 with switchable levers (short and long)
- Ambidextrous oversized charging handle machined from 6061 T6 aluminum
- MFT minimalist stock and engage grip.
- Light weight: 7.95lb



E.COM

ENSI

ATACDEF

BRONZE

M4 5.56

M4 5.56

Our M4 gives you the distinct style of a shorter handguard while maintaining the reliability and accuracy of all our AR 15's.

• 7075-T6 lower reciever, mil-spec with flared magazine sell, broached magazine well, ambi bullet markings, threaded bolt catch, captured rear detent, type III hardcoat anodzied (black)

Atac Defense M4-Q


- 7075-T6 upper receiver, mil-spec with M4 feed ramps, type III hardcoat anodzied (black)
- M16 Profile bolt carrier group, mil-spec MP/HP tested, properly staked 4130 Gas Key, 8620 carrier, 4340 cam pin, 8640 firing pin, 4340 extractor, S7 eiector
- 16in 4150 CrMoV barrel per *Mil-B-1159SE, (1:7 and 1:8 available) Twist government profile, HP/MPI tested, 5.56 chamber, 6 groove button rifled, .750 diameter at gas block, 1/2x28 thread, nitride coated.
- 3 Prong Flash Suppressor, phosphate coated

Atac Defense M4-M

Same specs as the M4-Q but utilizing a 10in 6061 free float handguard, using

knurled barrel nut, m-loc attachment points and is type III hardcoat anodzied (black)

- Low profile CNC machined 4140 hardened steel phosphate coated gas bock, direct impingement, carbine length, 304 stainless steel gas tube
- 6 position mil-spec 7075-T6, aluminum anodized, mil-spec end plate, mil-spec nut torqued and staked
- · Carbine Buffer, Mil-Spec spring
- · 10in 6061 Quad Rail Type III hardcoat anodzied handguard (black)
- 7075 Ambi, Type III Hardcoat Anodized charging handle
- Mil-Spec M4 type buttstock
- Mil-Spec A2 Pistol Grip
- · Built to Mil-spec standards, semi auto configuration lower parts kit





DMR (Designated Marksman Rifle)

.223 Wylde

Designed with accuracy, reliability and compatability in mind, our Designated Marksman Rifle is a dream to shoot.

- 7075-T6 lower receiver, Mil-Spec with Flared Magazine Well, Broached Magazine Well, Ambi Bullet Markings, Threaded Bolt Catch, Captured Rear Detent, Type III Anodized Finish
- 7075-T6 upper receiver, Mil-Spec with M4 Feed Ramps, Type III Anodized Finish
- M16 Profile bolt carrier group, mil-spec MP/HP tested, properly staked 4130 Gas Key, 8620 carrier, 4340 cam pin, 8640 firing pin, 4340 extractor, S7 eiector
- 4150 CrMoV barrel per *Mil-B-1159SE 1:8 Twist, 20" Medium Profile, HP/MPI tested, .223 wylde chamber, 6 groove button rifled, .750 diameter at gas block, 1/2x28 thread, nitride coated.

- Low Profile CNC Machined 4140 Hardened Steel Phosphate Coated gas bock, Direct Impingement, rifle length, 304 stainless steel gas tube
- 6 Position Mil-Spec 7075-T6 receiver extension, Aluminum Anodized, Mil-Spec End Plate, Mil-Spec Nut Torqued and Staked
- 7075 Aluminum Ambi charging handle, Type III Hardcoat Anodized
- · MFT Battlelink Minimalist buttstock
- · Available in Black Anodized Only



9mm Enhanced Pistol

4.5" or 8.5" 9mm Glock

Compact design AR style, integrated last round bolt hold open and compatible with popular Glock 9mm Magazines.

- 7075 T6 aluminum lower reveiver laser engraved with ambidextrous bullet markings
- 6061 T6 aluminum billet upper receiver
- Glock carrier group, 8620 steel carrier construction nitride finish, heavy firing pin retaining spring, 8640 firing pin
- · 4150 CrMoV barrel, 9mm chamber, 6 groove button rifled, ½ x 36 thread, nitride coated

- 6061 Free Float, Using knurled barrel nut handguard, M-Loc attachment points
- 7075 aluminum ambi, type III hardcoat anodized charging handle
- · Maxim Defense PDW pistol brace
- MFT Engage 15 degree pistol grip
- 3.5lb single stage trigger (curved or straight options)









ENSE.COM

ATACDEF



SILENT PRECISION



MSRP

\$935

SUPERIOR SOUND SUPPRESSION FOR .308 CALIBERS AND BELOW INCLUDES TWO BARREL ADAPTERS 1/2-28 + 5/8-24 & WRENCH TACTICAL OR NON-TACTICAL - TITANIUM - STAINLESS OR ALUMINUM

TRY OUR 30 BELOW SUPPRESSOR ON: .308(7.62), .30-06, 300WSM, 300 BLACKOUT, .284(7MM), .277, .264(6.5MM), .257, .243(6MM), .224(5.56), .223, 22LR, .204, 17

	MOI 30 BELDW MOI 30 BELDW
CALIBER	.308/7.62mm and below
FULL AUTO	YES - Table 2 Tested - 240 rounds - 10.5" Barrel 5.56 55g Nato@950RPM
LENGTH	6.81 inches (without ATAC Hub Adapter) 6.98 inches (with ATAC Hub Adapter installed)
DIAMETER	1.5 inches
WEIGHT	15.8 ounces (without adapter)
BARREL MOUNT	Includes TWO: ATAC Hub Thread Adapters – 1/2-28F x 1.375-24M and 5/8-24 F x 1.375- 24M
MATERIALS	17-4 H900 Heat Treated (Internals) & 304(Body)
FINISH	Black - High temp Cerakote®
INTENDED USE	Heavy use: Full-auto, semi-auto and bolt-action. Excellent sound reduction
SOUND REDUCTION	5.56 55g Nato ~134.7db @ 1 meter from the muzzle & 1.5 meter from the ground
USER SERVICEABLE	YES
WARRANTY	Limited Lifetime
PART NUMBER	30BELOWSSBLK





ATACDEFENSE.COM